



ZODIAC HURRICANE TECHNOLOGIES, INC.

Professional Division


P630 Mid IO



ZODIAC HURRICANE TECHNOLOGIES INC. - 7830 Vantage Way - Delta, British Columbia, Canada V4G 1A7

Tel: 604 940-2999 – Fax: 604 940-2779

www.zodiac.com

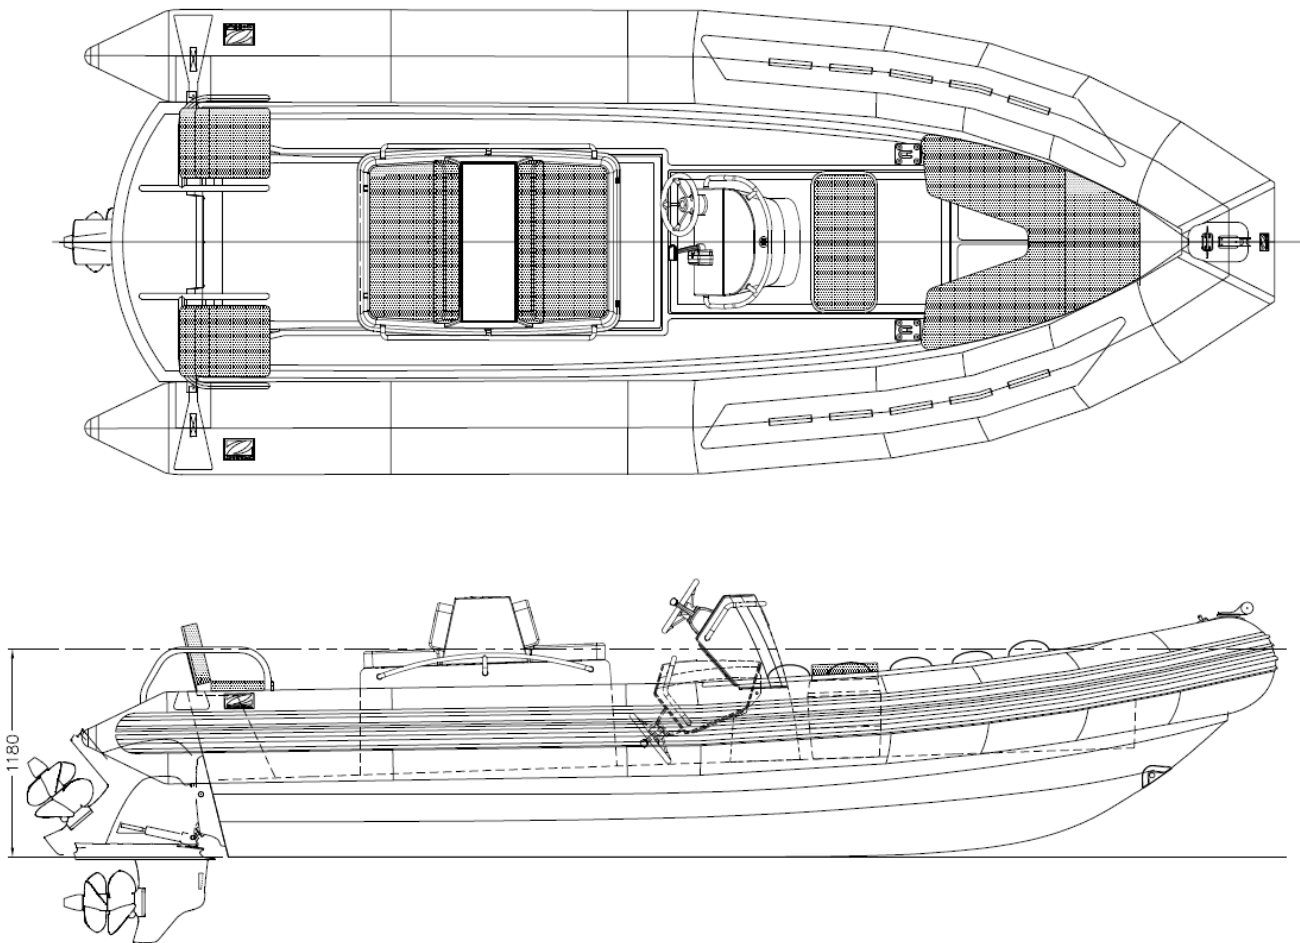

Physical Characteristics for P630 sterndrive (IO):

- Length Overall (leg trimmed up) - 7.10 meters (23.3')
- Beam Overall - 2.64 meters (8.6')
- Beam (collar deflated) - 1.89 meters (6.2')
- Minimum Height (collar deflated) - 1.18 meters (3.9')
- Collar Diameter - 0.53 meters (1.7')
- Collar Volume - 2867 liters (101 ft³)
- Fuel Capacity - 182 liters (48 US Gal)
- Displacement (with full fuel) - 1910 Kg (4200 lbs)
- Maximum Speed - 38 knots (44 mph)



P630 Proluxe Mid IO Description

General

- Complies with ISO:6185-3 and ABYC standards and recommended practices.
- Stainless steel fasteners throughout – All fasteners larger than 1/4” ASTM A 276, type 316. Fasteners installed with Tefgel anti-corrosion lubricant.
- Metric fasteners
- White plastic caps on visible interior component fastener heads on engine cover and console.
- Fiberglass components - white NPG gelcoat, isophthalic resin
- Stainless Steel – 316 or 316L for welded components
- Visible SS components electropolished
- Exterior aluminum components – powdercoated
- polished SS railings and frames
- Removable cushions, with removable Sunbrella coverings and EZ-Dry foam

Hull and Equipment

P630 IO/DJ PROLUXE BASIC BOAT

- SS bow eye
- SS transom tie downs
- Self draining deck, with high capacity scuppers
- Under deck cable routing
- Deck plates fasted with SS inserts, lag bolts are not used
- SS lift points, Two at transom, one at bow
- 6" SS deck cleats at transom
- SS deck hardware and latches
- SS folding pad eyes at the bow to be used with a tow bridle
- Operators manual
- SS ski tow point
- Walk through transom
- FRP Swim platform

P630 IO PROLUXE HULL GRP

- White NPG gelcoat
- Isophthalic resin, balsa or coremat core
- Flotation foam to meet ISO:6185-3 capacity requirements
- removable deck plates, fuel cover plates
- non-slip deck surfaces



P630 LOW PROFILE ENGINE COVER

- Removable top hatch to improve engine access while in garage
- SS latches and hardware
- Interior sound insulation reduces engine noise
- SS hand rails finished to yacht quality

PROLUXE PILOT CONSOLE, FOLDING

- Folding FRP console to lower profile of boat for storage while maintaining a comfortable operators position
- SS hardware
- SS hand rail finished to Yacht quality

P630 CUSHION SET – GREY

- Removable cushions allow boat to be used in a "utility" capacity
- Sunbrella, removable cushion covers
- EZ-Dry foam
- Custom colours available

Collar

P630 COLLAR, 5 CHAMBER WITH IC VALVES

- White 1670 dtex fabric, hypalon for superior maintenance characteristics
- 5 chamber collar design

P630 COLLAR ATTACHMENT FLANGING

- Collar can be easily removed, and re-installed without glue

P630 PROLUXE COLLAR DRESSING

- Double row of Proluxe grey nitrile rubstrake
- Fabric Proluxe grab handles
- Bow roller with integrated running lights and hidden fuel vent

Ancillary

PROLUXE FWD TOW BRIDLE, 200'

- 200' braided tow bridle

PROLUXE ANCILLARY EQT

- Manual inflation pump
- Pair of telescopic paddles in storage bag

FIRE EXTINGUISHER 2.5LB ABC

- White USCG approved 2.5 lb ABC fire extinguisher

P630 4 POINT LIFT SLING

- 4 leg, polyester sling with SS master link, and galvanized shackles

Electrical, Navigation & Communication

OPTIMA MARINE DUAL PURPOSE BATTERY (two batteries are standard)

- Optima D34M dual purpose battery, 12 VDC, 750 CCA, 55 Ah capacity

BATTERY SYSTEM, 1 ENG/2 BATTERY

- Dual battery system

PROLUXE 12 VOLT CHARGE SYSTEM

- 12 VDC charge point used with a ship based charge system.



- Charger is not included.

PROLUXE SWITCH/FUSE PANEL

- 8 circuit switch panel with fuse block.

PROLUXE LED NAV LIGHT PACKAGE

- LED navigation package includes extend-a-light anchor light, and bow mounted led navigation lights.

HORN, FLUSHMOUNTED ONGARO

- 12 VDC electric horn. Flush mounted, with SS bezel

BILGE PUMP, AUTOMATIC, 750GPH

- 750 gph automatic bilge pump with SS thru-hull outlet

PROLUXE LED DECK LIGHTS, 3

- LED courtesy lights

PROLUXE INTERIOR LED LIGHTS, 4

- Courtesy lights to illuminate interior spaces

PROLUXE COMPASS, RITCHIE TREK

- Ritche Trek compass with dimmer, white

Propulsion

P630 48 GAL FUEL SYSTEM

- 48 us gal rotomolded fuel tank.

FIXED HELM

- White wheel with silver spokes.

Propulsion Engine Options

VOLVO D3-190/SX ENGINE PACKAGE

- Volvo D3-190 engine package
- Chrome Volvo control
- LCD multifunction display

STEYR 256/BRAVO ONE OUTDRIVE PACKAGE

- Steyr 256 hp diesel with Bravo One outdrive
- Mercury control
- Steyr Gauges

STEYR 256/HAMILTON 213 WATERJET PACKAGE

- Steyr 256 hp engine
- Hamilton 213 jet
- Livorsi twin lever control
- Steyr Gauges



Additional Options Available

Hull and Equipment Options

P630 SS FRAME BOW SEAT - GREY

- Stainless steel pipe frame bases with Proluxe seat cushions

P630 SS BOW RAIL

- Stainless steel bow rail

P630 FLEXITEEK DECKING

- Flexiteek on all walking surfaces, including swim grid.

SINGLE POINT, RIGID LIFT FRAME

- Single point rigid lift frame inside engine cover
- Not to be used for hoisting with people onboard

P630 BIMINI TOP

- Sunbrella bimini, SS pipe frame
- GRP step treads used to mount frame onto collar

Collar Options

DR2 COLLAR

- Foam and air bladder hybrid collar
- Two chamber, 4.5 psi relief valves

P630 INBRD LIFE LINE

- White braided lifeline with white attachment patches.

FABRIC LETTERS

- Inlaid fabric letters, grey on a white background, 4" high

AUTO INFLATION

- 12 Volt automatic inflation system

Ancillary Options

P630 OVERALL COVER

- Sunbrella overall cover, encloses boat down to waterline
- Outdrive is not covered

SHRINK WRAP

- Protective shrink wrap used for shipping

SHIPPING CRADLE

- Wooden shipping cradle



Electrical, Navigation & Communication Options

SHORPWR/CHRGR 220/12 3 BATTERY

- 220 volt input to charge 3 batteries

GPS, GARMIN GPSMAP 540s

- Includes thruhull depth transducer and GPS antenna
- Compatible with XM weather in US

GPS, GARMIN GPSMAP 520S

- Includes thruhull depth transducer and GPS antenna
- Not compatible with XM weather in US

STEREO, AM/FM/MP3 - JENSON MSR2007

- Includes two 6" speakers and an ipod input

STEREO, AM/FM/CD/MP3 - CLARION CMD5

- Includes two 6" speakers and an ipod input

VHF RADIO

- DCIP capable VHF with remote mounted control head

OPTIMA MARINE STARTING BATTERY

- Optima battery specifically used for engine starting
- Not recommended as a house battery

BATTERY BOX AND HOLD-DOWN

- Battery box, and hold down kit (no battery included)

Customised versions

